

R3-50™

3-Axis Ultrasonic Anemometer



Key Features

- 3-axis research anemometer
- 50Hz output rate
- 0-45 m/s wind speed
- 0-359° wind direction
- U, V, W vector outputs
- Sonic temperature output
- Aluminium/carbon fibre construction
- Custom calibration provided as standard

The R3-50™ 3-axis anemometer has been designed for scientific research, particularly suitable for determining fluxes using the eddy covariance technique. This precision ultrasonic anemometer will monitor wind speeds up to 45m/s, with a fast data output rate of 50Hz. U, V, W and SOS (sonic temperature) outputs are available, and data can be logged using the supplied Gill WindCom™ software.

The R3-50 is of aluminium/carbon fibre construction and will operate effectively in environmental temperatures from -40°C to +60°C. Optional accessories are available including cables, sensor input units (analogue inputs) and power supplies.



Wind Speed

Range	0 - 45 m/s
Resolution	0.01 m/s
Accuracy	<1% RMS

Direction

Range	0 - 359°
Resolution	1°
Accuracy*	<±1° RMS

Speed of Sound

Range	300-370 m/s
Resolution	0.01 m/s
Accuracy	< ±0.5% @ 20°C

Measurement

Ultrasonic output rate	50 Hz
Parameters	UVW, Speed of Sound

Digital Output

Communication	RS422 full duplex, 8 data bits, 1 stop bit, no parity
Baud rates	2400 - 115200
Output parameters	Selectable 0.4 to 50 Hz

PRT Input

Input resolution	0.01°C
Input accuracy	<0.01°C (0 to 50°C) < 0.15°C (-40°C to +60°C)

Analogue Outputs (requires PCIA unit)

Quantity	7 (U, V, W, SoS, PRT plus 2 analogue outputs)
Scale	±10, ±20, ±30, ±60 m/s
Update rate	0.4 to 50 Hz
Range and resolution	±2.5 V, 14 bits
Accuracy	<0.1% of FSR

Analogue Inputs (requires SIU)

Quantity	6 differential inputs
Sampling rate	50 Hz
Range and resolution	±5 V, 14 bits
Accuracy	<0.1% of FSR

Power Requirement

Anemometer	9-30 VDC (<150mA @ 24 VDC or 300mA @ 12 VDC)
------------	--

Mechanical

Material	Aluminium/Carbon Fibre
Size	750mm x 240mm
Weight	1.0 kg

Environmental

Protection Class	IP65
Operating Temp	-40°C to +60°C
Precipitation	300mm/hr
EMC	BS EN 50081-1: 1992 (Emissions) BS EN 50082-1: 1997 (Immunity)
Suitable for exposure to a marine environment	


*Accuracy spec applies for wind speed <32 m/s and for wind incidence up to ±20° from the horizontal

R3-50™

3-Axis Professional Anemometer

Typical Applications

- Wind Turbulence Measurement
- Component Wind Velocity UVW
- Wind Profiling

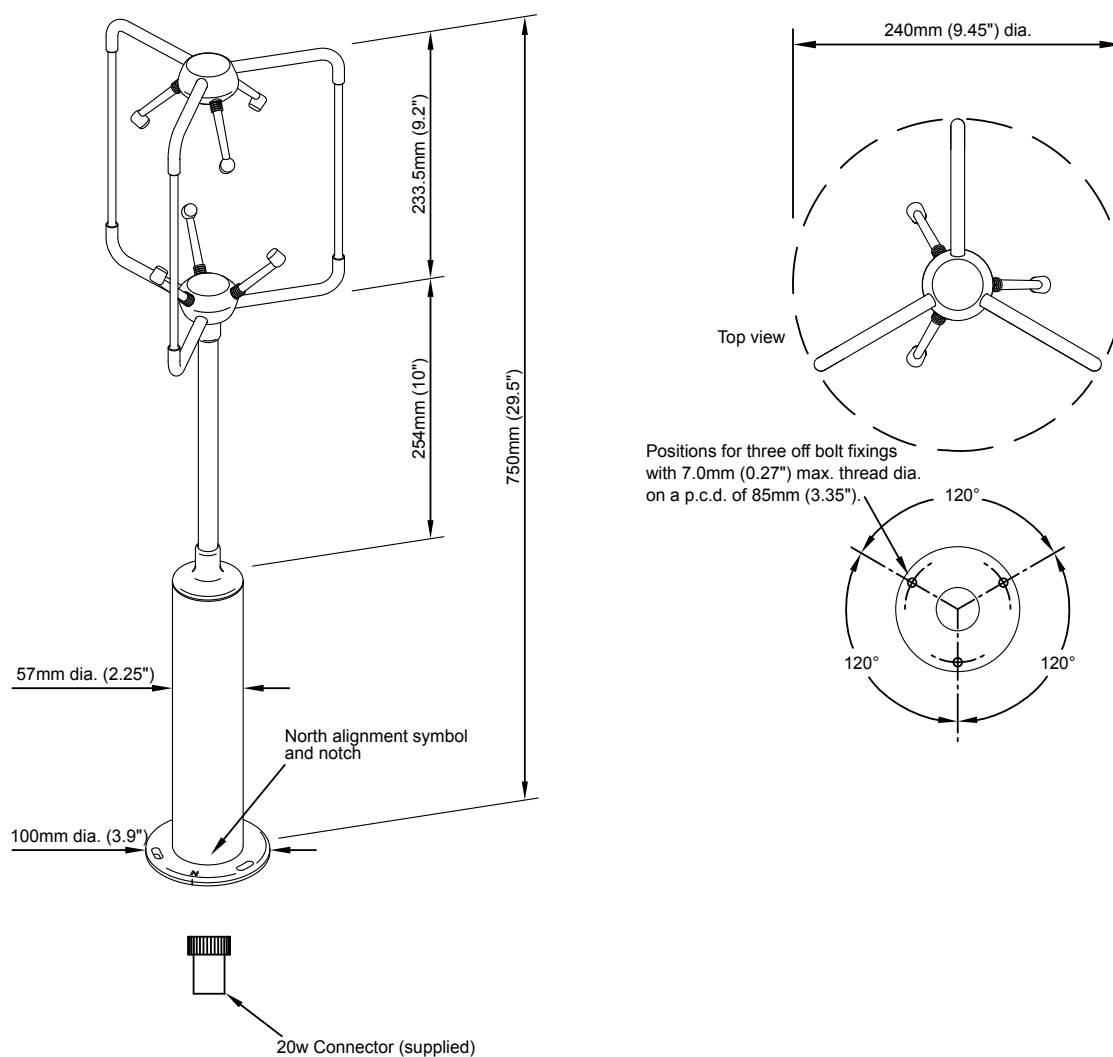

This product is in continuous development and therefore specifications may be subject to change without prior notice.



Gill Instruments Ltd
Saltmarsh Park
67 Gosport Street
Lymington
Hampshire
SO41 9EG, UK

T: +44 (0) 1590 613 500
F: +44 (0) 1590 613 501
E: anem@gill.co.uk

www.gill.co.uk



Copyright © Gill Instruments 2010
D403

Gill Instruments Ltd
Reg No. 3154453 Registered Office: The George Business Centre, Christchurch Road, New Milton, BH25 6QJ